

Sustainiac® is a registered trademark of Maniac Music Inc., Indianapolis IN.
 Stratocaster is a registered trademark of Fender Musical Instrument Corp., Scottsdale Arizona
 Ibanez is a registered trademark of Hoshino Musical Instrument Co., North Hollywood CA.

IBANEZ Jem® guitar with VLX-91 switch

Many recent Ibanez guitars have this switch

SUSTAINER OFF

1. Bridge humbucker
2. Bridge tap + middle
3. Middle
4. Neck + middle
5. Neck pickup (Sust. driver)

SUSTAINER ON

1. Bridge humbucker
2. Bridge tap
3. Bridge humbucker
4. Bridge humbucker
5. Bridge humbucker

**SUSTAINIAC®
DRIVER**

GROUND CONNECTIONS

1. Output jack
2. 9-volt (-) (same point as 10-pin black)
3. Sustainiac 8-pin black
4. Sustainiac 10-pin black
5. Sustainiac driver shield
6. Bridge pickup shield
7. Bridge pickup "low side"
8. C terminal of pickup selector switch containing bridge pickup tap wire
9. All pot bodies (whether 2 or 3).


****Orient board so that 8-pin connector is close to pickup selector sw. Keep white/orange wires SHORT and keep them away from circuit board.**

****Solder ground wires to pot body, or tab, but not to the square switch portion of the control. Otherwise, internal plastic parts will melt.**

****Keep wires short to minimize electronic crosstalk from sustainer to pickup signal, to minimize distortion and "grunge".**

BRIDGE PICKUP

Splice bridge pickup "low" side wire to shield wire, connect both to ground (pot body)
 Wire colors shown are often different for different pickup types/brands.

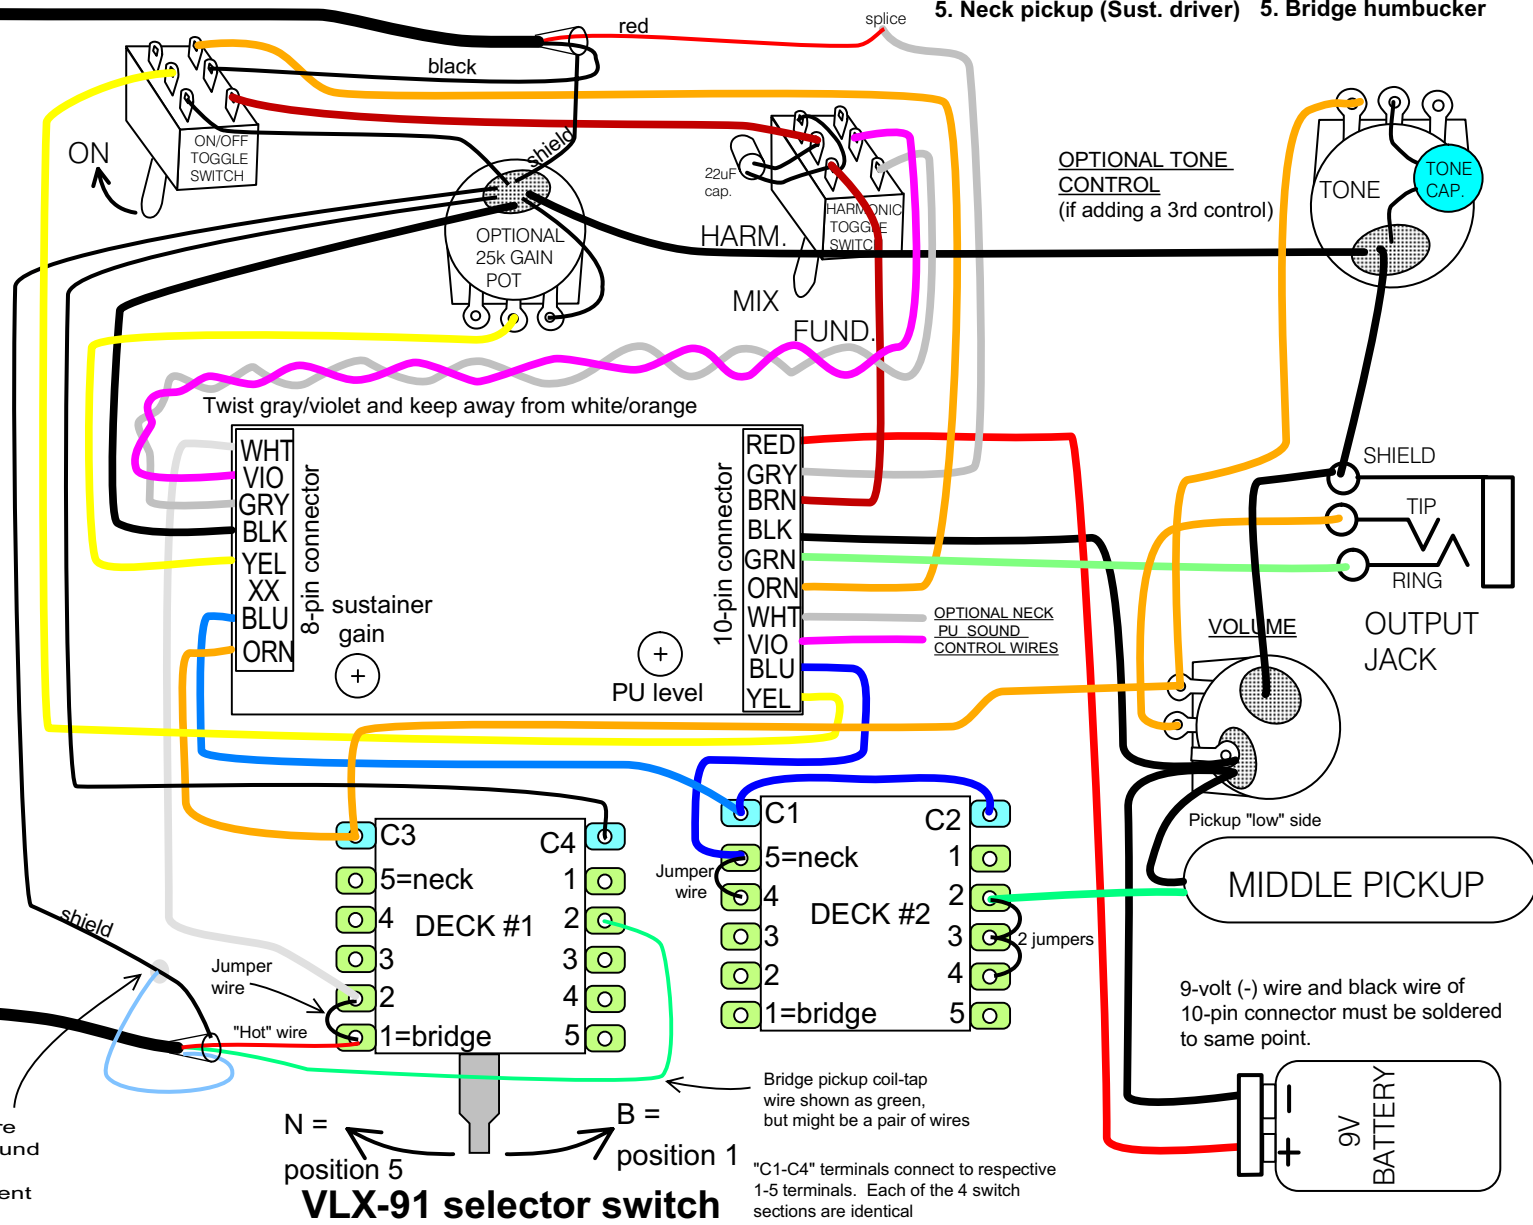

VLX-91 selector switch

N = position 5
 B = position 1

Bridge pickup coil-tap wire shown as green, but might be a pair of wires
 "C1-C4" terminals connect to respective 1-5 terminals. Each of the 4 switch sections are identical

9-volt (-) wire and black wire of 10-pin connector must be soldered to same point.