


SUSTAINIAC STEALTH PLUS INSTALLATION
 "SHREDDER" -TYPE GUITAR, import PU switch
 (JACKSON DINKY, etc.)
 VIEWED FROM REAR OF
 INSTRUMENT
 1-03

- NOTES:**
1. Make sure that battery (-) wire and black wire of 8-pin connector go to same point.
 2. Make sure that all pot bodies are connected to ground and also to output jack shield terminal
 3. Bridge/neck PU ground and shield terminals not shown for simplicity. Be sure that they are connected to pot body.

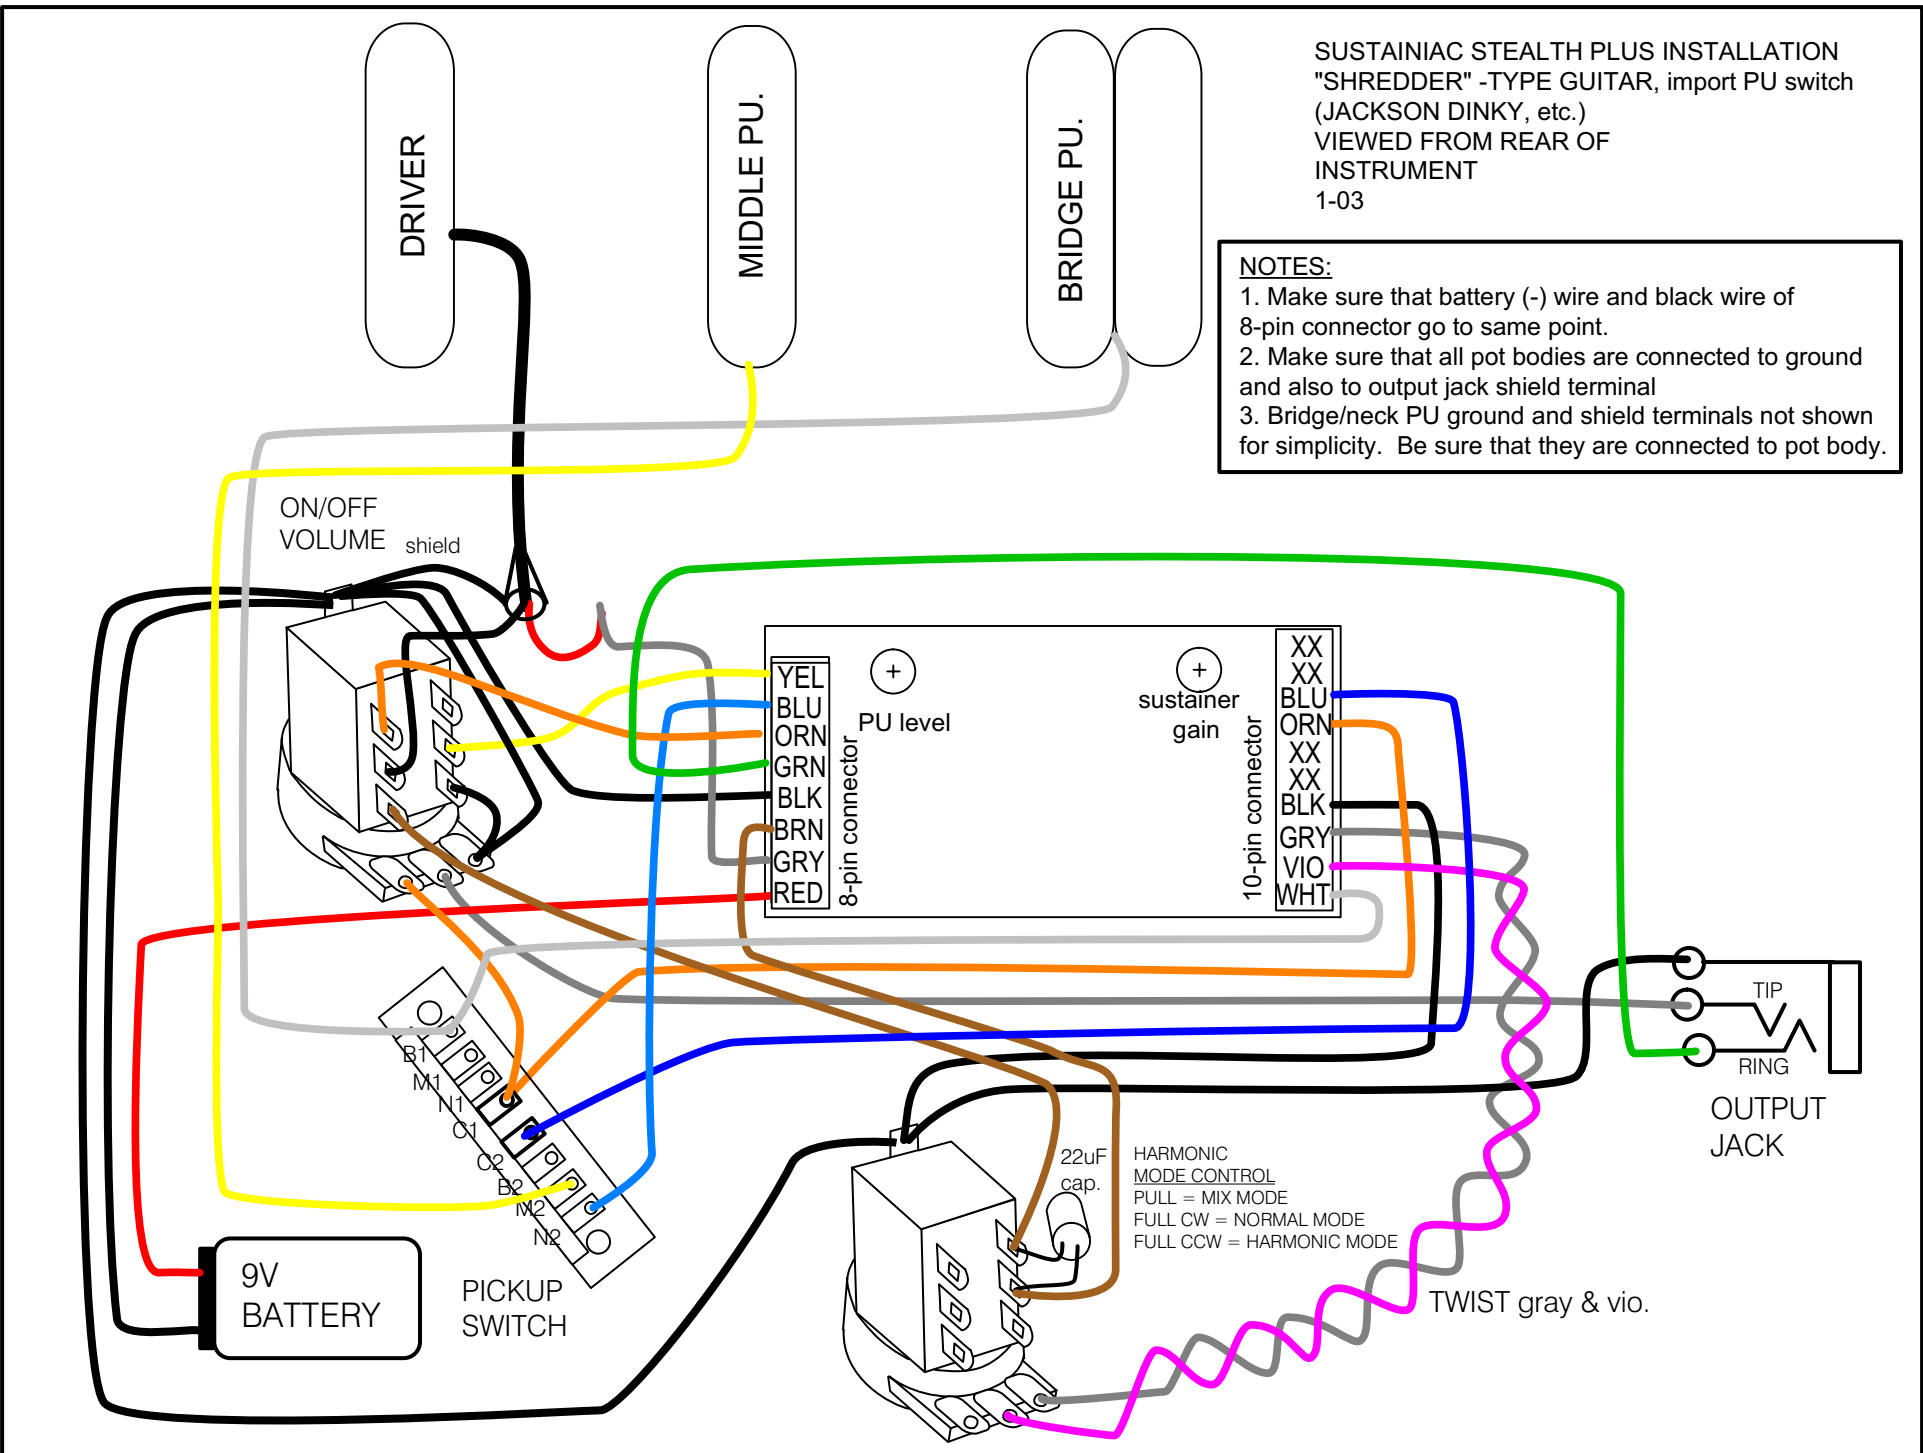

22uF cap.
 HARMONIC
 MODE CONTROL
 PULL = MIX MODE
 FULL CW = NORMAL MODE
 FULL CCW = HARMONIC MODE

TWIST gray & vio.